FOR IMMEDIATE RELEASE

ALAMOS GOLD INC.
130 Adelaide Street West, Suite 2200
Toronto, Ontario M5H 3P5
Telephone: (416) 368-9932 or 1 (866) 788-8801

Thursday, January 7, 2010

Alamos Gold Inc. Reports Record Quarterly Production Results, Provides Operations and Exploration Updates and 2010 Budgets, and Notice of 2009 Year-End Financial Results and Conference Call

Toronto, Ontario - Alamos Gold Inc. (TSX: AGI) ("Alamos" or the "Company") is pleased to report that in the fourth quarter ending December 31, 2009, it produced a record of 48,000 ounces of gold (before final refinery adjustments) at an expected total cash cost below $335 per ounce, which includes a 5% royalty. In 2009, Alamos exceeded the upper range of its production forecast and produced 178,500 ounces at an expected total cash cost below $335 per ounce.

Key operational metrics and production statistics for 2009 compared to 2008 are presented in tables 1 and 2 at the end of this press release.

The Company is also providing an update on mine operations and exploration activities, its 2010 operating guidance, and is announcing that it expects to release its 2009 year-end financial results on Tuesday, March 16, 2010 before the market opens. Senior management will also host a conference call at 11:00AM ET (8:00AM PT) that morning.

All amounts are in United States dollars unless stated otherwise.

Mulatos Fourth Quarter and 2009 Operations Update

Gold production at the Company's Mulatos Mine substantially exceeded forecasts in 2009, with full year production of 178,500 ounces. The Company began 2009 with plans to produce between 145,000 and 160,000 ounces of production at a total cash cost (including the 5% royalty) of $350 per ounce. Higher than budgeted recoveries in the first half of 2009 resulted in production exceeding budget and the Company raised its full-year production forecast to 160,000 to 170,000 ounces and reduced its total cash cost estimate to $335 per ounce. Continued operational and recovery improvements contributed to record gold production of 48,000 in the fourth quarter of 2009, resulting in the Company exceeding the top end of its full year production budget.

The primary factor driving higher gold production has been increased recoveries from the heap leach pad. In 2009, the "recovery ratio" of ounces produced divided by ounces stacked was 71%, compared to the budgeted level of 60%. The higher realized recoveries have resulted from a variety of operating initiatives, including a finer and more consistent product size being stacked on the heap, drum agglomeration, inter-lift liners, and use of the stacker-conveyor system.

In addition to recovery improvements, mining operations continue to benefit from a positive grade reconciliation relative to the block model. The Company also continues to encounter

substantially less waste in the pit than predicted by the block model, as evidenced by a low waste-to-ore ratio of 0.97 during the fourth quarter (1.03 for all of 2009 compared to the budgeted waste-to-ore ratio of 1.30).

Mulatos 2010 Operating Budget

In 2010, the Company is forecasting gold production of 160,000 to 175,000 ounces from the Mulatos Mine at a total cash cost (including the 5% royalty) of $338 per ounce, assuming an average royalty cost of $50 per ounce.

The following key assumptions form the basis for the 2010 production budget:

- Average recoveries of 68% (as per model)
- Average crusher throughput of 13,500 tonnes per day
- Average grade of 1.51 grams per tonne of gold ("g/t Au")
- Waste-to-ore ratio of 0.75
- Mexican Peso to United States dollar foreign exchange rate of 13.55:1

The 2010 production forecast range incorporates the assumptions presented above, as well as incremental expected recovery benefits from the closing of the crushing circuit and the potential for continued positive grade reconciliations.

Closing of the crushing circuit will result in all ore being stacked on the leach pad passing a 3/8-inch screen, compared to the current open circuit process where approximately 70% of the crusher discharge product is less than 3/8 of an inch in size. Laboratory studies indicate that finer crushing could result in a four to seven percentage-point increase in recovery, which could result in corresponding increased production and lower costs per ounce. The closing of the crushing circuit was completed during the fourth quarter of 2009, and commissioning is expected to be completed shortly.

The Company also anticipates that it will continue to encounter zones of vuggy silica within the Mulatos Pit. This may result in higher than forecasted average ore grades, which should correspond to higher gold production and reduced costs per ounce. Production from vuggy silica, which is often well-fractured and contains higher grade gold concentrations, has been the primary source of the positive grade reconciliation experienced at Mulatos relative to the block model. The block model cannot adequately predict the full extent of vuggy silica within the 2010 mine plan. Accordingly, the forecast range of production for 2010 is based primarily on the grade of the block model, with the potential for additional upside due to the possible presence of higher grades from vuggy silica.

Mulatos 2010 Capital Budget

The Mulatos 2010 capital budget is $64.6 million and is composed primarily of mine development projects, including Escondida and La Yaqui. The paragraphs and tables below outline the planned 2010 capital expenditures for Mulatos.

Development and pre-stripping activities have been ongoing since the third quarter of 2009. The mining contractor is achieving budgeted levels and development continues to be on track for ore mining to commence in the fourth quarter of 2011. The 2010 budget of $39.5 million includes $24.1 million for mining approximately 15.6 million tonnes of waste. In 2010, the Company expects to begin construction of a 500 tonne-per-day gravity mill to process ore from Escondida. Anticipated mill construction spending in 2010 is $7.9 million. Leach pad expansion activities in 2010 are estimated at $7.5 million. These expenditures are necessary in order to accommodate the Company's anticipated reserve growth.

Mine Expansion	Amount ($)
Pre-stripping Activities	$24.1 million
Mill/plant construction	$7.9 million
Leach pad expansion	$7.5 million
Sub-total	$39.5 million

Operating capital at Mulatos is expected to total $16.4 million in 2010. The Company plans to spend $7.5 million on a water treatment plant and $1.2 million on a new office complex in Hermosillo. Sustaining capital of $7.6 million includes $2.2 million related to mobile equipment component changes, $1.8 million in equipment purchases, $1.1 million in metallurgical and pit definition testing to support future mining activities, $1.0 million in crusher and process plant expenditures, and $1.5 million of other capital.

Mulatos Operating	Amount ($)
Water treatment plant	$7.6 million
New office in Hermosillo	$1.2 million
Sustaining capex	$7.6 million
Sub-total	$16.4 million

Other development costs in 2010 include investing $1.5 million to advance the La Yaqui project towards production. The Company is currently evaluating its options with respect to developing La Yaqui into a small scale heap leach operation within a two-year period. Land acquisition costs in 2010 include expenditures on various exploration and other projects within the Mulatos District. Budgeted relocation costs for 2010 include monthly payments made to relocated residents as well as expected additional home purchases.

Other Development	Amount ($)
La Yaqui	$1.5 million
Land acquisition	$5.3 million
Mulatos relocation	$1.9 million
Sub-total	$8.7 million

The Mulatos capital budget for 2010 currently excludes any potential costs associated with expanding the crushing circuit and throughput. The Company had retained external consultants to prepare a scoping study to evaluate the expected capital costs and benefits associated with increasing crusher throughput by up to 33% from current levels. The Company received the scoping study near the end of 2009 and is now working with its

consultants to optimize the recommendations presented in the report. A significant increase in crusher throughput should result in a higher rate of gold production and correspondingly lower costs per ounce than would otherwise be possible at existing throughput levels. The Company expects to be able to share the findings of the optimized scoping study during the first quarter of 2010.

Mulatos Exploration Update

In 2009, the Company set another record in terms of the number of metres ("m") drilled: The Company drilled 72,300 m in 357 holes from seven project areas at Mulatos, which was nearly twice the 38,600 m drilled in 2008.

Drilling in the fourth quarter focused on completing in-fill and definition drilling at Gap, expanding the areas of known mineralization at the Puerto del Aire ("PdA") Extension, and definition drilling at San Carlos. The location of these near-pit exploration projects are identified in Figure 1. The Company also completed a resource estimate for Cerro Pelon in the fourth quarter, which will be disclosed shortly.

The 2009 drilling program at Gap has demonstrated the continuity of gold-bearing silicified units, which should result in the majority of the inferred resources at Gap being converted to the measured and indicated categories. Mineralized intervals typically grade in the 1 to 2 g/t Au range, and drilling has also identified localized zones of higher grade material that may be suitable for future mill feed. Drilling at Gap has also outlined new resources not previously included in the Company's December 31, 2008 inferred resource estimate. Relevant assay results and drill hole collar data are presented in tables 3 and 4, respectively.

An ongoing drill program at the PdA Extension continues to reveal the presence of a very large system of intense silica alteration concealed by post-mineral volcanic cover that has characteristics similar to both the high-grade Escondida and PdA zones. The results from widely spaced drill holes suggest that the zone remains open in all directions and appears to have a minimum drill-indicated strike length of 800 m, a width of at least 200 m, and ranges in thickness from 25 to 125 m. In the areas where drilling has been completed, mineralization typically begins about 175 to 200 m below surface and generally grades in the 1 to 3 g/t Au range, with localized zones of high-grade material. Relevant assay results and drill hole collar data from the PdA Extension are presented in tables 5 and 6, respectively.

In November 2009, the Company began resource definition drilling at San Carlos with the objectives of upgrading the established inferred resources to the measured and indicated categories, expanding the known limits of the mineralized system, in-fill and step-out from previous strongly mineralized intercepts, and further defining a high-grade structural zone. The Company has drilled a total of 6,694 m in 27 holes since this program commenced and field observations have been very encouraging. Assays are pending and the results are expected to be announced shortly.

Mulatos 2010 Exploration Budget

In 2010, an aggregate of 43,500 m of RC and core drilling is planned at Mulatos as follows:

Project Area	Drilling (m)
San Carlos	8,250
PdA Extension	10,400
El Carricito	3,600
East Estrella	3,000
El Salto	2,000
Cerro Pelon	4,000
El Halcon	4,000
El Realito	2,250
Sub-total	43,500

Alamos also has reconnaissance-level exploration activities planned for Las Carboneras, San Nicolas, and on the south and west sides of Cerro Pelon.

The Company currently has three reverse circulation ("RC") rigs and one core rig operating at Mulatos. The core rig and two of the RC rigs are scheduled to complete the definition drilling program at San Carlos during the first quarter. The remaining RC rig is scheduled to be conducting in-fill and extension drilling at the PdA Extension until the end of May. The Company also anticipates that it will be able to start drilling at El Carricito, a large regional target, and commence reconnaissance-level exploration work on the south and west sides of the Cerro Pelon area by the end of the first quarter.

The total Mulatos exploration budget for 2010 is $7.0 million, with $5.6 million allocated for exploration activities, and the remaining $1.4 million allotted for administrative expenditures related to exploration. The Company expects that the majority of the exploration costs in Mexico in 2010 will be expensed.

2010 Ağı Dağı and Kirazli Exploration and Development Budget

As disclosed in the Company's press release dated January 6, 2010, Alamos expects to spend approximately US$12.8 million in Turkey on development and exploration activities related to Kirazli and the Deli, Baba, and Camyurt zones at Ağı Dağı during 2010. The Company intends to drill 34,000 m at a cost of US$6.8 million, which includes 5,000 m of in-fill and extension drilling at Kirazli, 20,000 m of in-fill and extension drilling at the Deli and Baba zones, 5,000 m of exploration drilling at Camyurt, and 4,000 m of drilling to gather additional geotechnical and metallurgical data. The 2010 development budget of US$6.0 million is related primarily to the completion of a scoping study in the first quarter of 2010, environmental impact assessments, initiation of a pre-feasibility study, and other corporate and administrative expenditures related to establishing operations in Turkey. The Company expects that the majority of its 2010 exploration and development costs in Turkey will be capitalized.

Notice of 2009 Year-End Financial Results and Conference Call

Alamos expects to release its 2009 year-end financial results on Tuesday, March 16, 2010 before the open of the TSX.

The Company's senior management will host a conference call on Tuesday, March 16, 2010 at 11:00AM ET (8:00AM PT) to discuss the financial results and to provide an update of the Company's operating, exploration, and development activities.

The conference call may be accessed via webcast or telephone as follows:

Via webcast:

A live audio webcast of the meeting will be available on the Company's website at www.alamosgold.com.

Via telephone:

For those preferring to listen to the conference call via telephone, please dial 416-695-6623 or toll-free at 1 800-355-4959 if you are calling from outside the Greater Toronto Area. To ensure your participation, please call at least five minutes prior to the scheduled start of the call.

Instant replay archive:

Please dial (416) 695-5800 or the toll-free access number 1 (800) 408-3053, pass code 6413365, followed by the # key.

The conference call should be available for replay from Tuesday, March 16, 2010 at 1:00PM EST to Tuesday, March 30, 2010 at 11:59 PM ET.

The webcast will be archived for 180 days on the Company's website.

QA/QC Programs

Mulatos exploration programs are conducted under the supervision of Herve Thiboutot, P.Eng., Vice President Exploration of the Company, and by Ken Balleweg, B.Sc. Geological Engineering, M.Sc. Geology, Registered Professional Geologist, Mexico Exploration Manager. Both are Qualified Persons as defined by National Instrument 43-101 of the Canadian Securities Administrators. Strict sampling and QA/QC protocol are followed, including the insertion of standards, blanks, and duplicates on a regular basis. Sample intervals are usually 1.5 m. Samples are sent to ALS Chemex Inc. in Hermosillo, Mexico for sample preparation and then to Vancouver, British Columbia for analysis. Analytical method is fire assay with atomic adsorption finish and gravimetric finish for individual samples with a gold concentration greater than 5.0 g/t Au. Composites presented in the assay results tables include intervals at >0.5 g/t Au over a 3-m minimum width, no assay are cut unless indicated.

About Alamos

Alamos is an established Canadian-based gold producer that owns and operates the Mulatos Mine in Mexico, and has exploration and development activities in Mexico and Turkey. The Company employs over 450 people in Mexico and is committed to the highest standards of environmental management, social responsibility, and health and safety for its employees and neighbouring communities. Alamos has over US$148 million cash on hand, is debt-free, and unhedged to the price of gold. Alamos' common shares are traded on the Toronto Stock Exchange under the symbol "AGI".

FOR FURTHER INFORMATION, PLEASE CONTACT:

John A. McCluskey
President and Chief Executive Officer
(416) 368-9932

Jeremy Link
Manager, Investor Relations
(416) 368-9932

The TSX has not reviewed and does not accept responsibility for the adequacy or accuracy of this release.

Cautionary Non-GAAP Statements

The Company believes that investors use certain indicators to assess gold mining companies. They are intended to provide additional information and should not be considered in isolation or as a substitute for measures of performance prepared with GAAP. "Total cash costs" as used in this analysis is a non-GAAP term typically used by gold mining companies to assess the level of gross margin available to the Company per ounce of gold by subtracting these costs from the unit price realized during the period. This non-GAAP term is also used to assess the ability of a mining company to generate cash flow from operations. There may be some variation in the method of computation of "total cash costs" as determined by the Company compared with other mining companies. In this context, "total cash costs" reflects the per ounce cash operating costs allocated from in-process and dore inventory associated with ounces of gold sold in the period, plus applicable royalties. "Total cash costs" may vary from one period to another due to operating efficiencies, waste-to-ore ratios, grade of ore processed, gold recovery rates and gold prices during the period.

Cautionary Note

No stock exchange, securities commission or other regulatory authority has approved or disapproved the information contained herein. This News Release includes certain "forward-looking statements". All statements other than statements of historical fact included in this release, including without limitation statements regarding forecast gold production, gold grades, recoveries, waste-to-ore ratios, total cash costs, potential mineralization and reserves, exploration results, and future plans and objectives of Alamos, are forward-looking statements that involve various risks and uncertainties. These forward-looking statements include, but are not limited to, statements with respect to mining and processing of mined ore, achieving projected recovery rates, anticipated production rates and mine life, operating efficiencies, costs and expenditures, changes in mineral resources and conversion of mineral resources to proven and probable reserves, and other information that is based on forecasts of future operational or financial results, estimates of amounts not yet determinable and assumptions of management.

Exploration results that include geophysics, sampling, and drill results on wide spacings may not be indicative of the occurrence of a mineral deposit. Such results do not provide assurance that further work will establish sufficient grade, continuity, metallurgical characteristics and economic potential to be classed as a category of mineral resource. A mineral resource which is classified as "inferred" or "indicated" has a great amount of uncertainty as to its existence and economic and legal feasibility. It cannot be assumed that any or part of an "indicated mineral resource" or "inferred mineral resource" will ever be upgraded to a higher category of resource. Investors are

cautioned not to assume that all or any part of mineral deposits in these categories will ever be converted into proven and probable reserves.

Any statements that express or involve discussions with respect to predictions, expectations, beliefs, plans, projections, objectives, assumptions or future events or performance (often, but not always, using words or phrases such as "expects" or "does not expect", "is expected", "anticipates" or "does not anticipate", "plans", "estimates" or "intends", or stating that certain actions, events or results "may", "could", "would", "might" or "will" be taken, occur or be achieved) are not statements of historical fact and may be "forward-looking statements." Forward-looking statements are subject to a variety of risks and uncertainties which could cause actual events or results to differ from those reflected in the forward-looking statements.

There can be no assurance that forward-looking statements will prove to be accurate and actual results and future events could differ materially from those anticipated in such statements. Important factors that could cause actual results to differ materially from Alamos' expectations include, among others, risks related to international operations, the actual results of current exploration activities, conclusions of economic evaluations and changes in project parameters as plans continue to be refined as well as future prices of gold and silver, as well as those factors discussed in the section entitled "Risk Factors" in Alamos' Annual Information Form. Although Alamos has attempted to identify important factors that could cause actual results to differ materially, there may be other factors that cause results not to be as anticipated, estimated or intended. There can be no assurance that such statements will prove to be accurate as actual results and future events could differ materially from those anticipated in such statements. Accordingly, readers should not place undue reliance on forward-looking statements.

Figure 1: Mulatos Pit Area

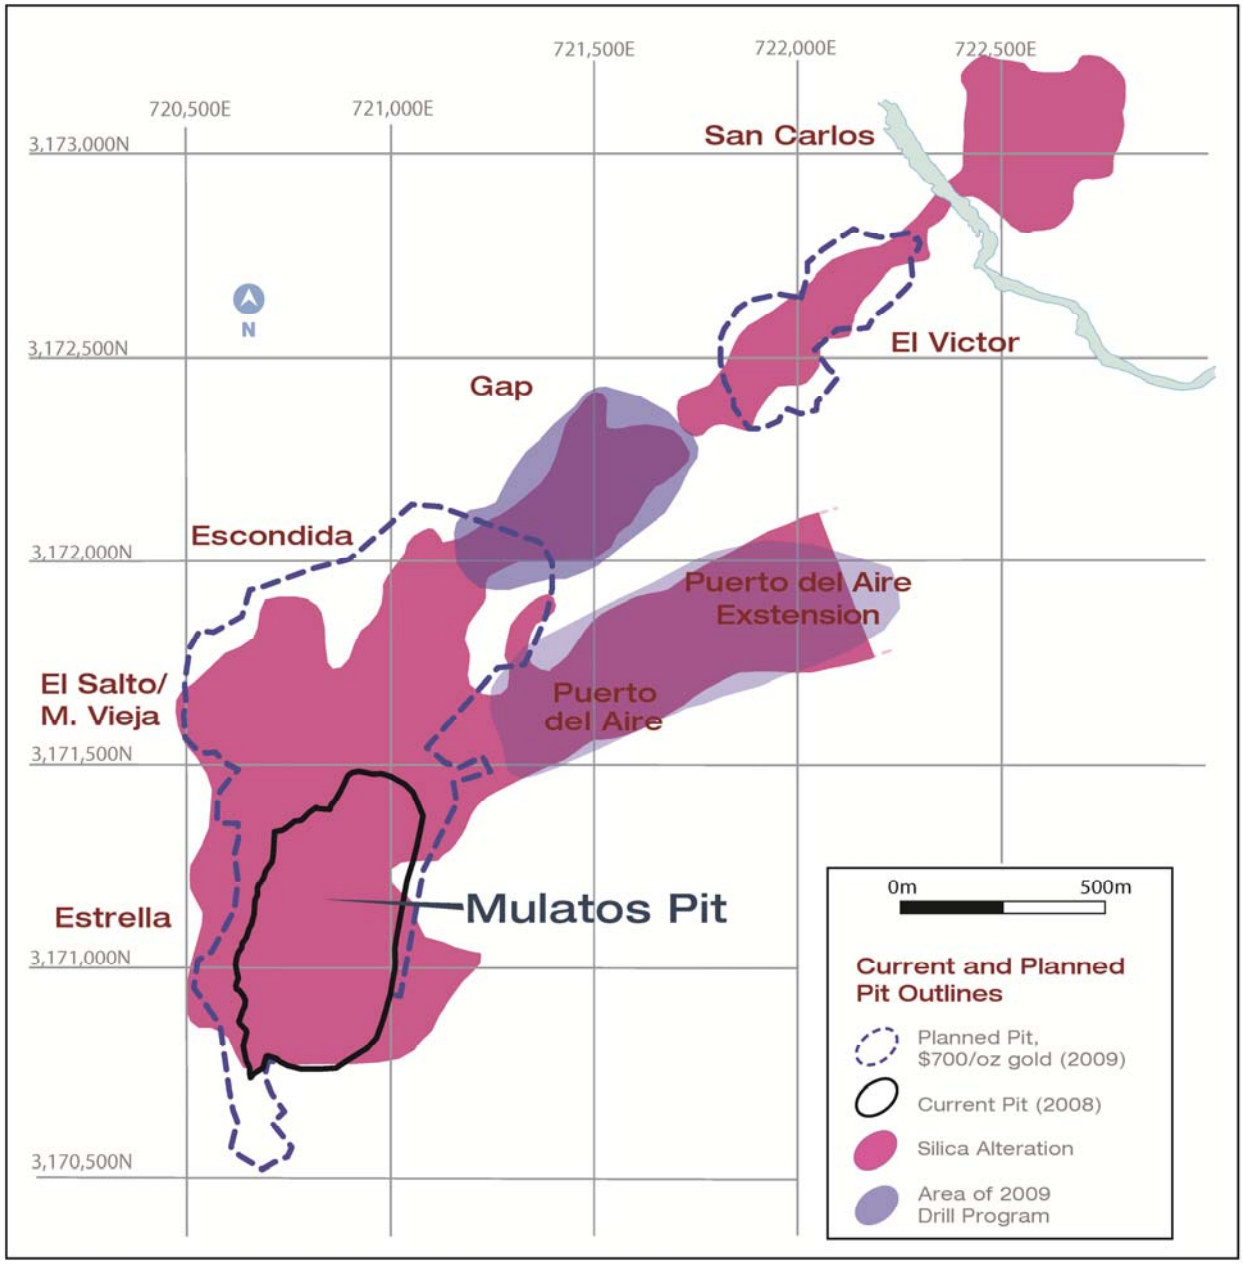


Table 1: Production Summary & Statistics [1,2]

	Q1 2009	Q2 2009	Q3 2009	Q4 2009	2009	2008	Change (%)
Ounces of Gold Produced [3]	46,000	42,000	42,500	48,000	178,500	151,000	18%
Ore mined (tonnes, 000s)	1,047	1,026	1,155	1,092	4,281	4,780	(9%)
Waste mined (tonnes, 000s)	1,532	1,081	751	1,064	4,428	6,559	(32%)
Total Material (tonnes, 000s)	2,579	2,107	1,906	2,156	8,748	11,339	(23%)
Waste-to-Ore Ratio (×)	1.46	1.05	0.65	0.97	1.03	1.37	(25%)
Ore Crushed (tonnes, 000s)	1,068	1,072	1,119	1,037	4,296	4,741	(9%)
Grade (g/t Au)	1.71	1.92	1.68	1.93	1.81	2.01	(10%)
Contained Ounces Stacked	58,715	66,172	60,439	64,345	249,672	306,299	(18%)
Ounces Produced (Au)	46,000	42,000	42,500	48,000	178,500	151,000	18%
Ratio of Gold Production to Contained Ounces Stacked	78%	63%	70%	75%	71%	49%	45%

(1) All amounts for Q4-2009 and 2009 YTD are preliminary and based on initial end of period estimates. Final adjustments may be required.
(2) Certain numbers may not compute due to the effects of rounding and truncation.
(3) Before final refinery settlements, which may result in increases or decreases to reported gold production.

Table 2: Unaudited Summary of Gold Sales and Costs [1]

	Q1 2009	Q2 2009	Q3 2009	Q4 2009	2009	2008	Change (%)
Gold Sales (ounces)	40,058	45,420	43,201	49,145	177,824	151,560	17%
Realized Gold Price Per Ounce	$887	$924	$956	$1,071	$964	$877	10%
Revenues (000s)	$35,521	$41,978	$41,283	$52,649	$171,431	$132,974	29%
Total Cash Cost per Ounce Sold [2]	$353	$324	$314	<$335	<$335	$389	--
Average London PM Fix	$908	$956	$960	$1,101	$974	$872	12%

(1) Certain numbers may not compute due to the effects of rounding and truncation.
(2) Total cash costs for Q4-2009 and YTD 2009 are preliminary estimates. Final adjustments may be required.

Table 3: Gap and Escondida - Select Composite Intervals
Include intervals at >0.5 g/t Au over a 3m minimum width, no assay cut (unless indicated)

Drill Hole (Azimuth/Inclination)	Drilling Method	Total Depth (m)	From (m)	To (m)	Interval (m)	Gold (g/t)
09EE166 325°/-70°	RC	213.41	54.88 **125** Inc.126.52 150.91	57.93 **146.34** 129.57 164.63	3.05 **21.34** 3.05 13.72	0.97 **1.95** 6.88 1.06
09EE167 145°/-72°	RC	152.44	97.56 112.8 140.24	109.76 114.33 143.29	12.2 1.53 3.05	1.49 6.22 0.52
09EE168 325°/-80°	RC	152.44	137.2	144.82	7.62	1.97
09EE169 325°/-80°	RC	213.41	No Intervals			
09EE170 305°/-80°	RC	182.93	**38.11** **Inc.48.78** **56.4** **Inc.57.93** **73.17** Inc.76.22 115.85 167.68	**53.35** **50.3** **70.12** **64.02** **109.76** 77.74 137.2 181.4	**15.24** **1.52** **13.72** **6.09** **36.59** 1.52 21.35 13.72	**4.42** **34.90** **27.70** **59.24** **1.22** 5.32 1.27 0.92
09EE171 312°/-65°	RC	182.93	22.86 62.5 **74.7** **123.48**	25.91 65.55 **118.9** **141.77**	3.05 3.05 **44.2** **18.29**	0.98 1.48 **2.04** **2.67**
09EE172 0°/-90°	RC	190.55	32.01 112.8 120.43 Inc.121.95	39.63 117.38 128.05 125	7.62 4.58 7.62 3.05	1.38 1.34 4.05 6.97
09EE173 325°/-80°	RC	152.44	**16.76** Inc.18.29 67.07 94.51 117.38 149.39	**53.35** 19.81 91.46 108.23 123.48 152.44	**36.59** 1.52 24.39 13.72 6.1 3.05	**1.39** 5.76 1.14 0.70 0.83 1.76
09EE174 325°/-80°	RC	152.44	106.71	120.43	13.72	0.83
09EE175 325°/-75°	RC	167.68	120.43	123.48	3.05	0.54
09EE177 325°/-75°	RC	182.93	88.41 121.95 164.63	92.99 135.67 167.68	4.58 13.72 3.05	0.80 0.76 0.57

Drill Hole (Azimuth/Inclination)	Drilling Method	Total Depth (m)	From (m)	To (m)	Interval (m)	Gold (g/t)
09EE178 325°/-60°	RC	213.41	No Intervals			
09EE181 0°/-90°	RC	254.57	**112.8** Inc.134.15 172.26 192.07 219.51 231.71 Inc.231.71	**144.82** 135.67 182.93 207.32 222.56 237.8 234.76	**32.02** 1.52 10.67 15.25 3.05 6.09 3.05	**1.77** 10.80 0.65 0.86 0.64 4.77 8.51
09EE182 325°/-80°	RC	213.41	173.78 181.4 201.22 207.32	176.83 187.5 204.27 222.55	3.05 6.1 3.05 15.23	0.65 0.79 0.59 0.94
09EE183 325°/-70°	RC	274.39	146.34 Inc.147.87 187.5 201.22 228.66 242.38	153.96 149.39 198.17 213.41 233.23 260.67	7.62 1.52 10.67 12.19 4.57 18.29	3.74 12.70 0.88 0.97 0.96 0.74
09EE184 325°/-75°	RC	213.41	No Intervals			
09EE185 325°/-80°	RC	231.71	172.26 184.45 204.27	181.4 192.07 216.46	9.14 7.62 12.19	0.62 0.79 0.78
09EE186 0°/-90°	RC	243.9	152.44 173.78 199.7	163.11 176.83 205.79	10.67 3.05 6.09	0.67 0.89 0.75
09EE187 0°/-90°	RC	198.17	153.96	157.01	3.05	0.80
09EE192 0°/-90°	RC	243.9	178.35	189.02	10.67	0.88
09EE196 0°/-90°	RC	248.48	**175.3** 195.12 207.32	**185.98** 201.22 228.66	**10.68** 6.1 21.34	**4.17** 1.16 0.83
09EE197 325°/-80°	RC	274.39	141.77 160.06 187.5 216.46	155.49 176.83 198.17 239.33	13.72 16.77 10.67 22.87	0.89 1.15 0.71 0.69
09EE198 325°/-80°	RC	198.17	140.24 158.54	146.34 182.93	6.1 24.39	0.73 0.91

Drill Hole (Azimuth/Inclination)	**Drilling Method**	**Total Depth (m)**	**From (m)**	**To (m)**	**Interval (m)**	**Gold (g/t)**
09EE199 325°/-80°	RC	259.15	**185.98**	**231.71**	**45.73**	**1.03**
09EE200 325°/-70°	RC	274.39	152.44 185.98 216.46 225.61 239.33	173.78 211.89 221.04 236.28 245.43	21.34 25.91 4.58 10.67 6.1	1.15 1.00 0.50 0.94 0.78
09EE201 0°/-90°	RC	202.74	138.72 160.06 185.98	143.29 170.73 196.65	4.57 10.67 10.67	0.56 0.92 1.45
09EE202 325°/-80°	RC	259.15	153.96 189.02 201.22 219.51	158.54 198.17 207.32 230.18	4.58 9.15 6.1 10.67	2.93 0.67 0.58 1.32
09EE203 325°/-75°	RC	182.93	121.95 141.77	138.72 161.59	16.77 19.82	1.02 0.76
09EE204 325°/-65°	RC	274.39	No Intervals			
09EE205 0°/-90°	RC	182.93	117.38 138.72	120.43 150.91	3.05 12.19	0.77 1.99
09EE206 325°/-75°	RC	289.63	**219.51** **Inc.221.04** 242.38 260.67 271.34	**231.71** **225.61** 257.62 266.77 274.39	**12.2** **4.57** 15.24 6.1 3.05	**5.17** **10.80** 0.87 1.00 4.86
09EE207 325°/-75°	RC	182.93	109.76 141.77 169.21 179.88	128.05 166.16 172.26 182.93	18.29 24.39 3.05 3.05	0.78 0.70 1.20 0.88
09EE208 325°/-83°	RC	243.9	222.56	225.61	3.05	0.82
09EE209 325°/-65°	RC	182.93	97.56 **118.9**	115.85 **170.73**	18.29 **51.83**	1.11 **1.21**
09EE210 325°/-50° Final	RC	182.93	**96.04** Inc.108.23 128.05	**125** 109.76 144.82	**28.96** 1.53 16.77	**2.19** 15.75 0.69
09EE211 325°/-75°	RC	259.15	233.23 245.43	236.28 248.48	3.05 3.05	1.39 0.63
09EE212 0°/-90°	RC	152.44	19.81 36.59 45.73 70.12 **80.79**	22.86 42.68 64.02 77.74 **125**	3.05 6.09 18.29 7.62 **44.21**	0.66 0.75 0.62 0.64 **2.48**

Drill Hole (Azimuth/Inclination)	**Drilling Method**	**Total Depth (m)**	**From (m)**	**To (m)**	**Interval (m)**	**Gold (g/t)**
09EE213 325°/-70°	RC	152.44	41.16 94.51 117.38 123.48	47.26 99.09 120.43 128.05	6.1 4.58 3.05 4.57	0.90 0.76 0.53 1.00
09EE214 325°/-70°	RC	152.44	**13.72** 41.16 57.93 71.65 126.52 146.34	**38.11** 50.3 65.55 86.89 141.77 152.44	**24.39** 9.14 7.62 15.24 15.25 6.1	**2.22** 0.63 1.02 1.28 0.82 0.62
09EE215 0°/-90°		152.44	18.29 45.73 51.83 68.6 80.79	28.96 48.78 57.93 71.65 118.9	10.67 3.05 6.1 3.05 38.11	1.03 0.56 0.68 0.83 0.90
09EE216 0°/-90°	RC	152.44	No Intervals			

Table 4: Gap and Escondida – Drill Hole Collar Data

Drill Hole	Total Depth (m)	Easting (m)	Northing (m)
09EE166	213.41	721,819	3,172,297
09EE167	152.44	721,760	3,172,436
09EE168	152.44	721,757	3,172,441
09EE169	213.41	721,853	3,172,214
09EE170	182.93	721,862	3,172,347
09EE171	182.93	721,862	3,172,348
09EE172	190.55	721,749	3,172,366
09EE173	152.44	721,899	3,172,367
09EE174	152.44	721,701	3,172,348
09EE175	167.68	721,691	3,172,302
09EE176	152.44	721,911	3,172,349
09EE177	182.93	721,672	3,172,324
09EE178	213.41	721,576	3,172,290
09EE179	182.93	721,877	3,172,355
09EE180	152.44	721,894	3,172,289
09EE181	254.57	721,536	3,172,186
09EE182	243.9	721,672	3,172,149
09EE183	274.39	721,590	3,172,107
09EE184	213.41	721,920	3,172,199
09EE185	231.71	721,656	3,172,169
09EE186	243.9	721,567	3,172,050
09EE187	198.17	721,590	3,172,267
09EE188	228.66	721,594	3,172,056
09EE189	213.41	721,613	3,172,234
09EE190	243.9	721,506	3,172,137
09EE191	289.63	721,388	3,171,975
09EE192	243.9	721,531	3,172,037
09EE193	213.41	721,481	3,172,218
09EE194	243.9	721,531	3,172,036
09EE195	251.52	721,561	3,172,105
09EE196	248.48	721,452	3,172,154
09EE197	274.39	721,619	3,172,110
09EE198	198.17	721,586	3,172,220
09EE199	259.15	721,548	3,172,074
09EE200	274.39	721,619	3,172,110
09EE201	202.74	721,541	3,172,219
09EE202	259.15	721,474	3,172,077

Drill Hole	Total Depth (m)	Easting (m)	Northing (m)
09EE203	182.93	721,540	3,172,220
09EE204	274.39	721,457	3,172,011
09EE205	182.93	721,849	3,172,312
09EE206	289.63	721,370	3,172,006
09EE207	182.93	721,848	3,172,312
09EE208	243.9	721,386	3,172,056
09EE209	182.93	721,848	3,172,313
09EE210	182.93	721,848	3,172,313
09EE211	259.15	Pending Survey	
09EE212	152.44	721,883	3,172,448
09EE213	152.44	721,961	3,172,344
09EE214	152.44	721,919	3,172,383
09EE215	152.44	Pending Survey	
09EE216	152.44	721,971	3,172,332

Table 5: PdA and PdA Extension - Select Composite Intervals
Include intervals at >0.5 g/t Au over a 3m minimum width, no assay cut (unless indicated)

Drill Hole (Azimuth/Inclination)	Drilling Method	Total Depth (m)	From (m)	To (m)	Interval (m)	Gold (g/t)
09PA181 150°/-80°	RC	341.46	No Intervals			
09PA182 0°/-90°	RC	349.09	304.88 323.17	315.55 326.22	10.67 3.05	0.86 0.54
09PA183 330°/-60°	RC	324.7	306.4	309.45	3.05	3.05
09PA184 150°/-60°	RC	365.85	No Intervals			
09PA185 0°/-90°	RC	385.67	286.59 358.23 376.52	295.73 373.48 379.57	9.15 15.25 3.05	0.88 1.24 0.69

Table 5: PdA and PdA Extension – Drill Hole Collar Data

Drill Hole	Total Depth (m)	Easting (m)	Northing (m)
09PA181	341.46	722,257	3,171,895
09PA182	349.09	722,123	3,172,070
09PA183	324.7	722,345	3,172,015
09PA184	365.85	722,347	3,172,011
09PA185	385.67	722,121	3,171,736
09PA186	327.74	722,556	3,172,095